




www.otanityre.com

DISTRIBUTED BY:

NORD-TRUCK GmbH
Reifenhandel und Export
Im Winkel 7 * D-24980 Hörup
Telefon: +49 - 4639 - 78291 - 0
Telefax: +49 - 4639 - 78291-21



**DER OTANI OH-301
DIE RICHTIGE WAHL
ZU JEDER ZEIT**

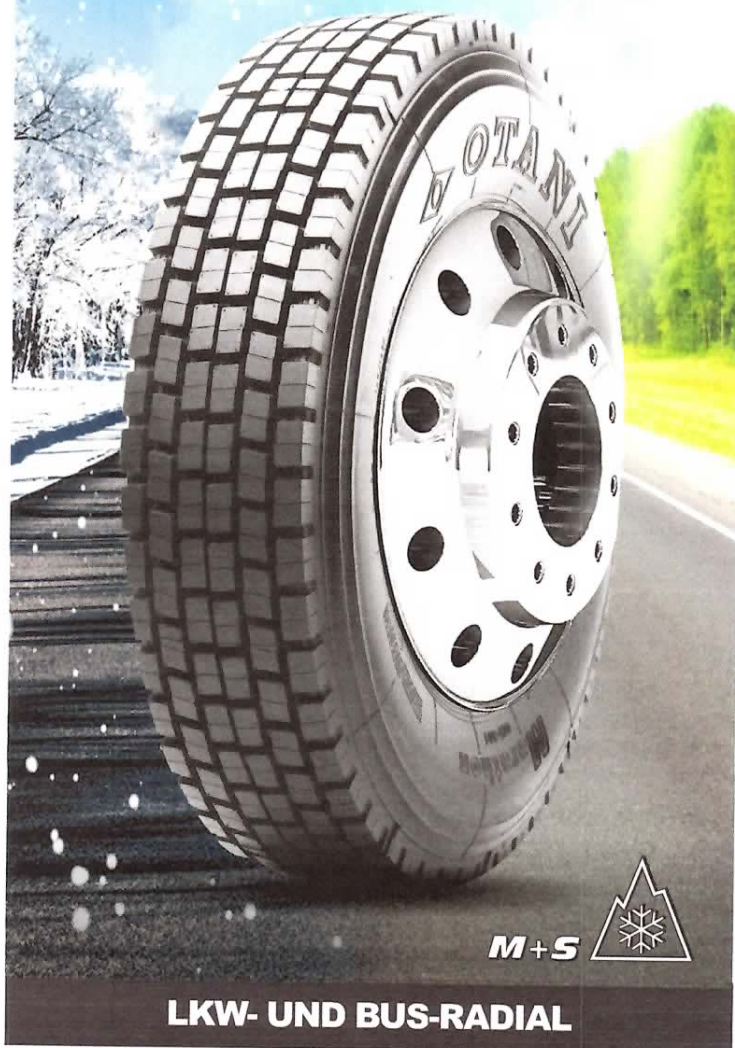

M+S



LKW- UND BUS-RADIAL



OH-101

Size	PR	Load Index	Speed Symbol	Tread Depth mm	RR	Wet Grip	Pass By Noise	Grade
11 R22.5	16	148/145	M	17.0	D	B	72	🔊
12 R22.5	16	152/148	M	16.0	D	B	72	🔊
275/80 R22.5	16	149/146	M	16.0	D	B	72	🔊
295/80 R22.5	16	152/148	M	17.0	D	B	72	🔊
315/80 R22.5	20	156/150	L	17.0	D	B	72	🔊

OH-101 SUPER

Size	PR	Load Index	Speed Symbol	Tread Depth mm	RR	Wet Grip	Pass By Noise	Grade
315/80 R22.5	20	156/150	L	17.0	D	A	72	🔊

OH-102 M+S

Size	PR	Load Index	Speed Symbol	Tread Depth mm	RR	Wet Grip	Pass By Noise	Grade
385/65 R22.5	20	160	K	15.0	C	B	73	🔊

OH-107

Size	PR	Load Index	Speed Symbol	Tread Depth mm	RR	Wet Grip	Pass By Noise	Grade
11 R22.5	16	148/145	L	16.0	D	B	71	🔊
275/70 R22.5	16	148/145	M	15.0	D	B	71	🔊
295/80 R22.5	16	152/148	M	15.0	D	B	71	🔊
315/80 R22.5	20	156/150	L	15.0	D	B	71	🔊

OH-108 M+S

Size	PR	Load Index	Speed Symbol	Tread Depth mm	RR	Wet Grip	Pass By Noise	Grade
385/55 R22.5	20	160	K	13.0	D	B	73	🔊

OH-109 M+S

Size	PR	Load Index	Speed Symbol	Tread Depth mm	RR	Wet Grip	Pass By Noise	Grade
215/75 R17.5	12	126/124	M	10.0	D	B	71	🔊
215/75 R17.5	16	135/133	K	10.0	D	B	71	🔊

OH-110 M+S

Size	PR	Load Index	Speed Symbol	Tread Depth mm	RR	Wet Grip	Pass By Noise	Grade
315/70 R22.5	16	154/150	L	15.0	D	B	72	🔊

OH-111 M+S

Size	PR	Load Index	Speed Symbol	Tread Depth mm	RR	Wet Grip	Pass By Noise	Grade
385/55 R19.5	18	156	J	14.0	E	B	73	🔊

OH-112 M+S

Size	PR	Load Index	Speed Symbol	Tread Depth mm	RR	Wet Grip	Pass By Noise	Grade
7.00 R16	12	117/116	L	13.0	E	B	70	🔊
7.50 R16	14	122/118	L	13.0	E	B	70	🔊
9.5 R17.5	14	129/127	L	14.0	E	B	70	🔊
215/75 R17.5	12	126/124	M	14.0	E	B	70	🔊
215/75 R17.5	16	135/133	K	14.0	E	B	70	🔊

OH-201 M+S

Size	PR	Load Index	Speed Symbol	Tread Depth mm	RR	Wet Grip	Pass By Noise	Grade
11 R22.5	16	148/145	L	16.0	D	B	73	🔊
295/80 R22.5	16	152/148	M	15.0	D	B	73	🔊
315/80 R22.5	20	156/150	L	15.0	D	B	73	🔊

OH-203 M+S

Size	PR	Load Index	Speed Symbol	Tread Depth mm	RR	Wet Grip	Pass By Noise	Grade
385/65 R22.5	20	160	K	16.0	C	B	73	🔊

OH-204 M+S

Size	PR	Load Index	Speed Symbol	Tread Depth mm	RR	Wet Grip	Pass By Noise	Grade
265/70 R19.5	18	143/141	J	14.0	D	A	72	🔊

OH-301 M+S

Size	PR	Load Index	Speed Symbol	Tread Depth mm	RR	Wet Grip	Pass By Noise	Grade
11 R22.5	16	148/145	M	19.0	E	B	75	🔊
12 R22.5	16	152/148	M	22.0	F	C	75	🔊
315/70 R22.5	16	154/150	L	22.0	E	C	75	🔊
295/80 R22.5	16	152/148	M	22.0	E	C	74	🔊
315/80 R22.5	20	156/150	L	22.0	E	C	74	🔊

OH-312 M+S

Size	PR	Load Index	Speed Symbol	Tread Depth mm	RR	Wet Grip	Pass By Noise	Grade
315/80 R22.5	20	156/150	K	22.0	F	C	75	🔊

TEST REPORT

TW-TL17-OT001-E117SP

Measurements concerning:

Tyre snow performance according to snow traction method of UN / ECE Regulation No. 117

Candidate tyre

Make (trade name of manufacturer): OTANI
Trade description(s): OH-301
Size description(s): 11R22.5 148/145M
Load Index: 148
DOT: E6 1415
Tyre classification: C3

Standard reference tyre

Description: ASTM-F2871
Size: 245/70R19.5 136/134M
Load Index: 136
DOT: FWLB 008 X 4515

Customer: Otani Tire Co., Ltd.
55 Mu 7 Klongami, Petchakaseam rd.
Sampran, Nakhonpathom 73110
Thailand

Measured snow index value relative to SRTT:	1.66
--	-------------

Statement of compliance

The measurements HAVE SHOWN the compliance of the candidate described in this Test Report with the requirements according to the UN / ECE Regulation No. 117 including 03 series of amendments.

The measurements were carried out in accordance with the SFS-EN ISO/IEC 17025.

Ivalo, March 6th 2017



.....
Jukka Antila
Technical Director



.....
Markus Hilli
Manager - Type Approval Services

Index of Test Report

Measurements pages 1-2
Annex A: Pictures of candidate..... 1 page

Internet link for checking valid scopes for Test World Oy: <http://www.testworld.fi/scopes>

This Test Report may only be reproduced in full, except with the prior written permission by the issuing Laboratory.

TEST REPORT

TW-TL17-OT001-E117SP

Annex A



Tread pattern of candidate

Used Instruments:

Temperature:	Fluke 52-II	ser: 31550028WS
Speed:	VBox 3i	ser: 028463
Weight:	Dini Arego	ser: 0100140252B1...B4
Pressure:	Wika DG10	ser: TW-IPM024
CTI:	CTI Penetrometer	ser: TW-PM005